


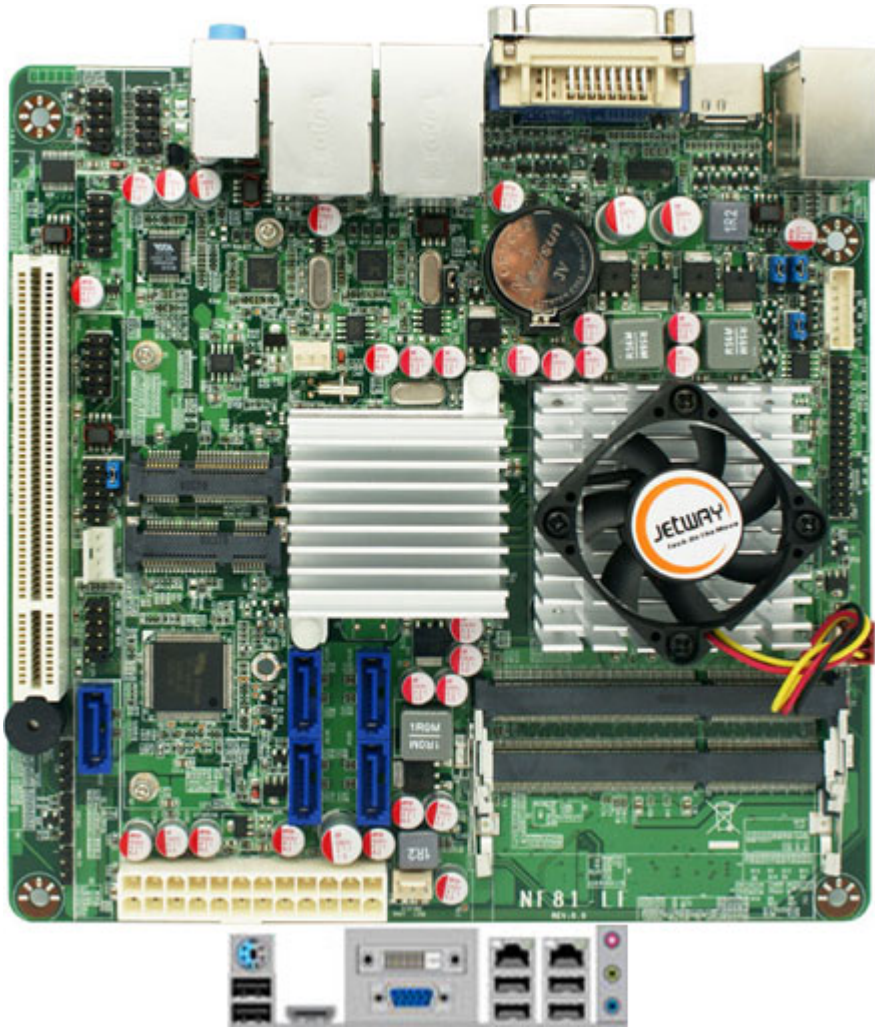

194.00 EUR

incl. 19% VAT, plus [shipping](#)

- AMD T56N
- DirectX 11
- 2x Gigabit LAN !
- SATA 6GB/s !

**Support:**  [Review \[DE\]](#) |  [Review \[EN\]](#) |  [AMD G-T56N Benchmark](#) |  [Specifications \[EN\]](#)

- AMD Brazos eOntario + Hudson E1 Chipset
- Support AMD eOntario (G-Series) Dual core 1.6GHz APU
- Support DirectX 11 3D Graphics Acceleration
- Support 5 \* Serial ATA3 (6Gb/s) Devices with RAID 0,1,5,10 & 1 \* mSATA
- Support DDR3 800-1066 Single Channel 64-bit, up to 8GB
- Integrated VIA VT1705 HD Audio CODEC with 6-CH
- 1 \* 24 bit Dual Channel LVDS header
- Support DVI-D/HDMI Output
- Supports 2 \* Realtek RT8111E Gigabit LAN
- Support CPU Smart FAN
- Compliance with ErP standard

|                |                                                                                                    |
|----------------|----------------------------------------------------------------------------------------------------|
| CPU            | AMD eOntario (G-Series) T56N Dual core 1.6GHz APU                                                  |
| Chipset        | AMD Brazos eOntario + Hudson E1 Chipset                                                            |
| Memory         | 2 * SODIMM Sockets for un-buffered Single Channel 64-bit DDR3<br>800-1066 SDRAM up to 8 GB         |
| Expansion Slot | 1 * 32-bit PCI slot<br>1 * Mini PCI-E                                                              |
| Storage        | 5 * Serial ATA3 6Gb/s connectors support HDD with RAID 0, 1,<br>5,10 functions<br>1 * mSATA socket |
| Audio          | VIA VT 1705 6-Channel HD Audio                                                                     |
| Ethernet LAN   | 2 * Realtek RTL8111E PCI-E LAN chip for Gigabit LAN                                                |

---

|                |                                                                |
|----------------|----------------------------------------------------------------|
| USB            | Embedded 10 * USB 2.0/1.1                                      |
| LVDS           | Onboard 24-bit dual channel LVDS connector                     |
|                | 6 * USB 2.0/1.1 ports                                          |
|                | 1 * PS2 KB/MS port                                             |
|                | 2 * RJ-45 ports                                                |
| Real Panel I/O | 1 * Audio I / O port                                           |
|                | 1 * VGA port                                                   |
|                | 1 * DVI-D port                                                 |
|                | 1 * HDMI port                                                  |
|                | 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports                    |
|                | CPU / Chassis Fan connectors;                                  |
| Internal I/O   | 1 * 24-pin ATX Power connector                                 |
|                | 1 * 24 bit Dual Channel LVDS header                            |
|                | 1 * COM Port & 1 * GPIO header                                 |
|                | 1 * CIR header                                                 |
| BIOS           | AMI 16MB SPI Flash ROM                                         |
| Form Factor    | Mini ITX Form Factor(170mmx170mm)                              |
| Funtional      | ATM, Automation, medical Equipment, Security, Networking, POS, |
|                | General Application, Gaming Machine, Transportation            |
| Certificate    | CE, FCC, RoHS                                                  |

**Scope of supply:**

- Jetway NF81-T56N-LF Mainboard
- Driver CD
- Manual
- COM Cable
- 2x SATA Cable
- I/O Shield