


149.00 EUR  
incl. 19% VAT, plus [shipping](#)

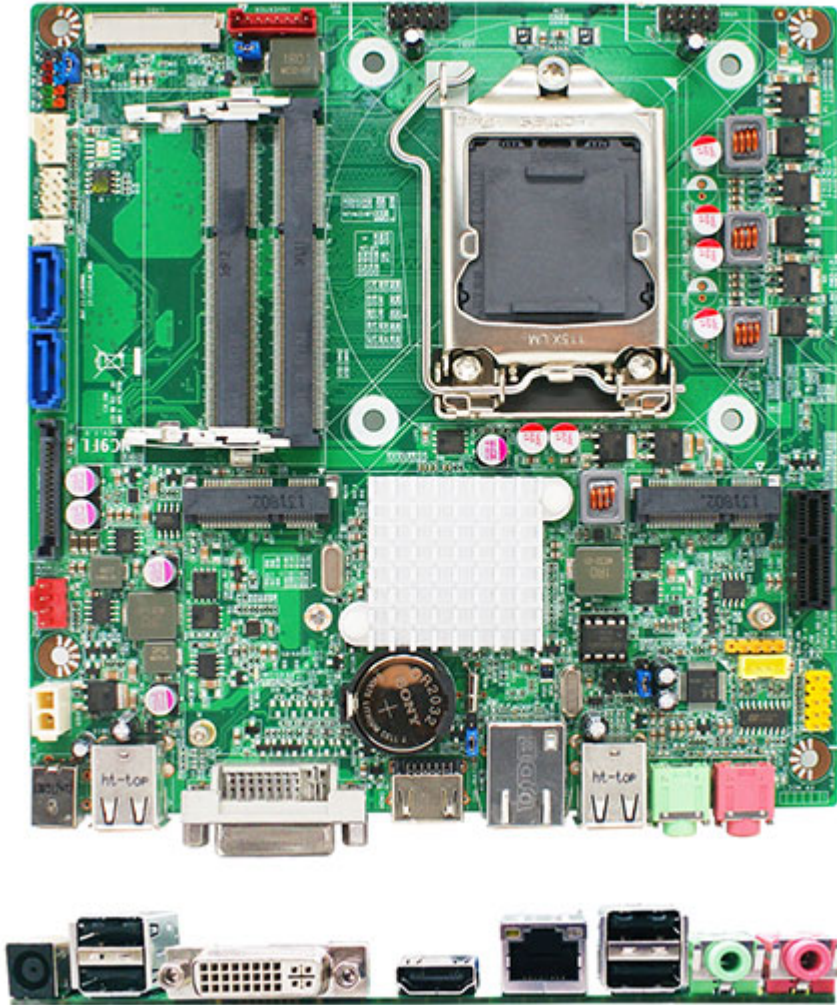

- INTEL® H61 Chipset
- Support INTEL® LGA 1155 Socket Core i3/i5/i7 & Pentium Processor
- 2 \* Dual Channel SO-DIMM DDR3-1333/1066 up to 16GB
- Support CPU Smart FAN
- Supports 1 \* Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Thin Mini ITX form factor

|                         |                                                                                 |
|-------------------------|---------------------------------------------------------------------------------|
| <b>CPU</b>              | • INTEL® LGA 1155 Socket Core i3/i5/i7 & Pentium Processor                      |
| <b>Chipset</b>          | • INTEL® H61 Chipset                                                            |
| <b>Memory</b>           | • 2 * SO-DIMM Sockets Dual Channel DDR3 1066/1333 SDRAM up to 16 GB             |
| <b>Expansion Slots</b>  | • 1 * PCIe x 1<br>• 1 * half size Mini PCI-E socket                             |
| <b>Storage</b>          | • 2 * Serial ATA2 3Gb/s connectors<br>• 1 * full size mSATA socket (mSATA only) |
| <b>Audio</b>            | • Realtek ALC662-VD-GR 6-Channel HD Audio CODEC                                 |
| <b>Ethernet LAN</b>     | • IN82579 PCI-E Gigabit Ethernet LAN *1                                         |
| <b>USB</b>              | • Embedded 8 * USB 2.0/1.1                                                      |
| <b>Special Features</b> | • Support ACPI S3<br>• Support CPU Smart FAN<br>• Support Watch Dog             |

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Rear Panel I / O</b> | <ul style="list-style-type: none"> <li>• 4 * USB 2.0/1.1 ports</li> <li>• 1 * HDMI</li> <li>• 1 * 19V DC-in jack</li> <li>• 1 * RJ-45 port</li> <li>• 1 * DVI-I port</li> <li>• 1 * MIC-in &amp; 1 * Line-out jacks</li> </ul>                                                                                                                                                                                                         |
| • <b>Internal I / O</b>   | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports</li> <li>• CPU /System Fan connectors;</li> <li>• 1 * 24-bits Dual CH LVDS &amp; 1 * Inverter connector</li> <li>• 1 * CIR header</li> <li>• 1 * AUDIO header</li> <li>• 1 * Speaker header</li> <li>• 1 * DMIC header</li> <li>• 1 * Front panel header</li> <li>• 1 * Monitor switch header</li> <li>• 1 * 2-pin ATX Power connector</li> </ul> |
| • <b>BIOS</b>             | • AMI 8Mb DIP Flash ROM                                                                                                                                                                                                                                                                                                                                                                                                                |
| • <b>Form Factor</b>      | • Thin Mini ITX Form Factor (170mm x 170mm)                                                                                                                                                                                                                                                                                                                                                                                            |
| • <b>Functional</b>       | • ATM, POS, AIO, Digital Signage                                                                                                                                                                                                                                                                                                                                                                                                       |
| • <b>Certificate</b>      | • CE, FCC, RoHS                                                                                                                                                                                                                                                                                                                                                                                                                        |
| • <b>Temperature</b>      | <ul style="list-style-type: none"> <li>• Operating within 0-60 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>                                                                                                                                                                                                                                                                                                       |